

# Technical data sheet


## BauderPVC LSF

### Embossed walkway membrane



24/03/2026

<b>Product description</b>	Polyester reinforced PVC-P single ply walkway membrane.	
<b>Application fields</b>	Walkway membrane reduces the potential for slip when installed over the field sheet waterproofing.	
<b>Surface</b>	top:	dark grey RAL 7012
	bottom:	black
<b>Reinforcement type and weight</b>	synthetic reinforced polyester	
<b>Article number</b>	6003 1075	
<b>Website link</b>	<a href="https://www.bauder.co.uk/products/bauder-pvc-lsf">https://www.bauder.co.uk/products/bauder-pvc-lsf</a>	

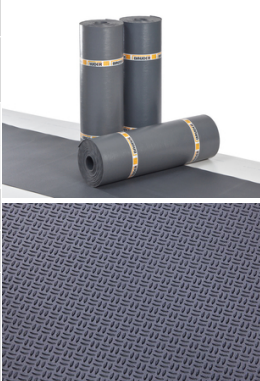

Characteristic	Test method	Unit	Value
Visible defects	EN 1850-2	-	no visible defects
Length	EN 1848-2	m	20 (-0/+5%)
Width	EN 1848-2	m	0,75 (-0,5/+1%)
Straightness	EN 1848-2	mm	< 30
Flatness	EN 1848-2	mm	< 10
Mass per unit area	EN 1849-2	kg/m <sup>2</sup>	> 2,2
Effective thickness	EN 1849-2	mm	> 2,2
Nominal thickness incl. profile	-	mm	> 2,2
Overall thickness	EN 1849-2	-	2.20
Water tightness	EN 1928 - B	-	passed
Reaction to fire	EN 13501-1	-	class E
Tensile strength ld	EN 12311-2 A	N/50mm	≥800
Tensile strength td	EN 12311-2 A	N/50mm	≥800
Elongation ld	EN 12311-2 A	%	≥19
Elongation td	EN 12311-2 A	%	≥19
Tensile strength ld	EN 12311-2 B	N/mm <sup>2</sup>	≥15
Tensile strength td	EN 12311-2 B	N/mm <sup>2</sup>	≥15
Elongation ld	EN 12311-2 B	%	≥200
Elongation td	EN 12311-2 B	%	≥200

# Technical data sheet

## BauderPVC LSF

### Embossed walkway membrane



Characteristic	Test method	Unit	Value
Resistance to impact hard surface	EN 12691	mm	≥600
Resistance to impact soft surface	EN 12691	mm	≥900
Resistance to static loading hard surface	EN 12730	kg	≥20
Resistance to static loading soft surface	EN 12730	kg	≥20
Tear resistance (length)	EN 12310-2	N	> 110
Tear resistance (transversal)	EN 12310-2	N	> 110
Resistance to root penetration	EN 13948/FLL	-	NPD
Dimensional stability Id	EN 1107-2	%	≤0,3
Flexibility at low temperature	EN 495-5	°C	≤ -30
UV exposure	EN 1297	-	passed, class 0 (> 5000 h)
Durability Watertightness after artificial ageing	EN 1296 - EN 1928 (B 24h/60kpa)	-	no performance declared
Hail resistance soft surface	EN 13583	m/s	≥46
Water vapour transmission	EN 1931	-	20000 (±30%)
External fire performance	CEN/TS 1187	-	not applicable

<b>Normative references</b>	For undated references, the latest edition of the referenced document (including any amendments) applies.
<b>Product surface finish</b>	Bauder PVC embossed walkway membrane achieves slip resistance class R10 and water drainage class V5
<b>Product storage guidance</b>	Store the materials outdoors, laid horizontal/flat and off the ground with suitable robust UV resistant, flame-retardant tarpaulin. Ensure the product(s) are clear of buildings and any other storage areas. Where there are storage containers on site, these may be suitable for storing products.
<b>Pallet size</b>	Pallet size = 18 rolls/270m <sup>2</sup> per pallet
<b>Packaging material</b>	The product will be delivered on wooden pallets with polyethylene overwrap to protect the product. Each roll has a recycled cardboard core. Recycled nylon straps contain the rolls on a pallet.
<b>Handling/PPE</b>	All persons using the product should be fully aware of the manual handling methods as roofing materials are heavy and can cause serious injury. When using/handling the product, installers should be provided with, and wear, suitable personal protective equipment.
<b>Disposal guidance</b>	Waste of the product is not a hazardous substance. Observe local regulations. European Waste Catalogue EWC number 170203 "Plastic Mirror Non hazardous"
<b>Re-use options of product</b>	Please refer to EPD stated below in Certification and environmental information.
<b>Further information/documents</b>	Current documents such as DoP's (where relevant), brochures, installation guides, etc. can be found by visiting <a href="http://www.bauder.co.uk">www.bauder.co.uk</a>
<b>Safety Data Sheet</b>	Safety Data Sheets are designed to provide the necessary information to recipients of substances and mixtures in the EU & UK. This product is classed as an article; therefore, this product does not have a requirement for a Safety Data Sheet.